



CAN SPEEDOMETER INSTRUCTIONS


- P/N 553-120 4-1/2" 160 MPH Speedometer (Black)
- P/N 553-120W 4-1/2" 160 MPH Speedometer (White)
- P/N 553-122 3-3/8" 160 MPH Speedometer (Black)
- P/N 553-122W 3-3/8" 160 MPH Speedometer (White)

The Holley EFI CAN speedometer is designed to utilize the OBD-II port to provide a variety of functions speed measurement.

IMPORTANT! Disconnect the battery prior to installation!

1. Connect speedometer power requirements as shown below.
2. Mount speedometer for easy viewing. Use included spin lock ring for mounting to gauge panel.
3. Snap white gauge connector to wire harness.

WIRING DIAGRAM:

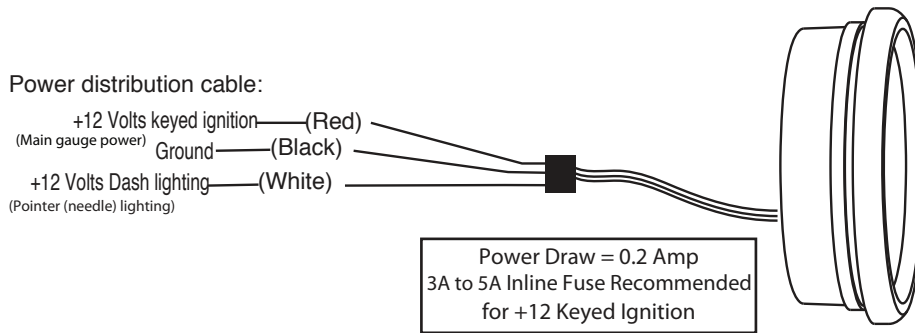


OBDII and Daisy Chain Setup

Note: A set of CAN-bus Gauges can be daisy chained together in any order.

CAUTION: Do not connect the Daisy Chain while connected to a powered OBDII system. Failure to do so will throw a check engine code.

Wire Direct Note: CAN-BUS gauges (individual or daisy chained) will not function when used in conjunction with any other OBDII device. Cycle the gauge power to restore proper gauge function.

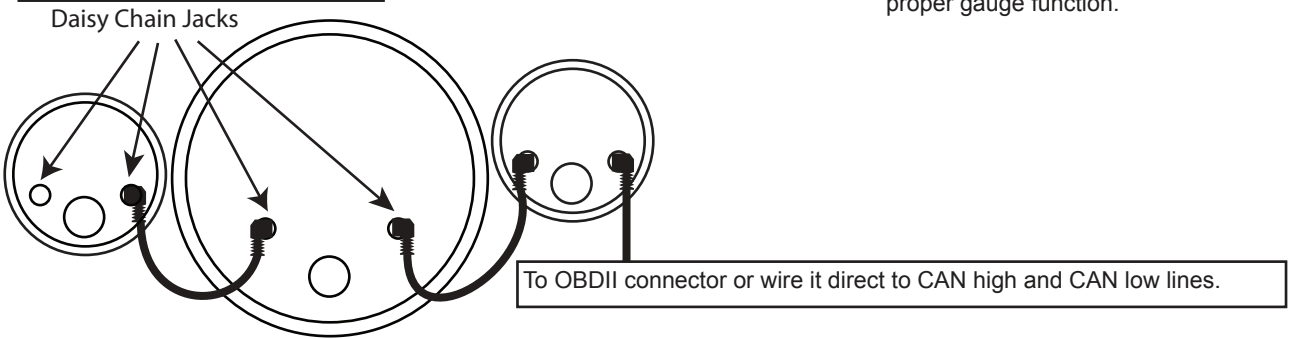

SPEEDOMETER MENU SETTINGS:

Odometer and trip

000000 MI Odometer (shows up to 999,999 miles or kmh)

000000 MI Trip Odometer (shows up to 99,999.9 miles or kmh)
Press and hold button to reset trip.

Holley Technical Support: 1-866-464-6553

© 2016 Holley Performance Products, Inc. All rights reserved.

199R11144
Date: 6-30-16