




P/N 151153 & 151853 - 53 lb/hr Deka IV Standard USCAR



**Features:**

Fuel Compatibility	Standard Gasolines & Ethanol Flex Fuels
Fuel Pressure	400 kPa
Static Flow Rate	n-Heptane: 7.75 g/sec (61 lb/hr, 768 cc) 53 lb/hr / 587 cc @ 300 kPa
Dynamic Flow Rate	n-Heptane: 13.6 mg/pulse (2.5 ms PW, 20 ms Period)
Offset	0.75
Minimum Linear PW	1.9 ms
Linear Flow Range (SAE)	8
Opening/Closing Time	1.3 / 0.7 ms
Coil Resistance	12.0 •
Injector Inductance	11.6 mH
SMOV / DMOV	5.92 V / 6.48 V
Connector	USCAR
Spray Pattern	Pencil
Installation Compatibility	IV Standard, V Standard, & VII Standard Installation Compatible
Identification Shell Color	Grey

**Basic Dimensions:**

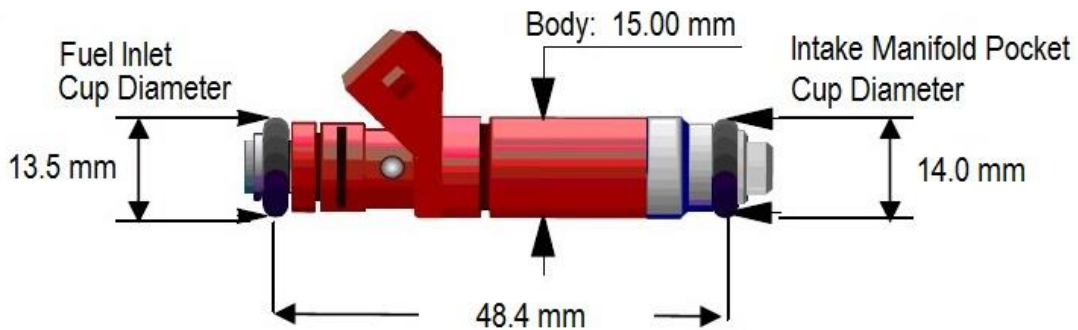

199R11427  
Date: 10-19-17