




**1993 - 2002 GM F-Body Floor Brace
71223001HKR
Installation Instructions**

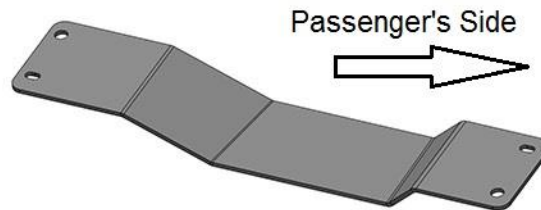

Thank you for choosing to use this Hooker™ component as part of your performance project. This floor brace was designed for bolt-in compatibility with any Hooker 4th-gen F-body dual exhaust system.

PRE-INSTALLATION CONSIDERATIONS:

These instructions are written under the assumption that a Hooker 4th-gen F-body dual exhaust system has already been installed on the vehicle and the factory floor brace is removed from the vehicle.

CAUTION! WORK ONLY ON A LEVEL SURFACE. USE JACKS /JACKSTANDS OF SUFFICIENT CAPACITY TO LIFT AND SUPPORT YOUR VEHICLE. NEVER WORK UNDER A VEHICLE SUPPORTED BY A FLOOR OR BUMPER JACK.

INSTALLATION:

1. Raise and support the vehicle at a comfortable working height.
2. Install the Hooker floor brace to the bottom of the vehicle reusing the fasteners that attached the stock floor brace to the vehicle.
3. For proper installation, the offset formed into the middle of the brace must be oriented down. Position the offset (valley) towards the passenger's side of the vehicle (see drawing above).

© 2015 Hooker Headers, Inc. All rights reserved.

199R10882

Revision date: 8-19-15