



**Super Competition Full Length Car Headers  
7529HKR (Black) & 7529-1HKR (Ceramic)**

**1975-81 Camaro, 78-81 Firebird/Trans Am, & 75-77 Chevelle/Malibu/EI Camino/Caballero/Sprint/Wagons; 396-502**

Thank you for making HOOKER HEADERS your choice in a high-performance exhaust system. Extensive dyno/track testing has enabled HOOKER to offer the most advanced design in headers for your application. Due to the restricted room available in the engine compartment, your headers may be close to some body and chassis components. This condition is normal. The installation, while not complex, will take a certain amount of time. However, the additional horsepower and improved performance will more than justify your efforts. Proper installation and maintenance will ensure long life and maximum performance from your hooker exhaust system.

**WARNING!** Breaking in an engine with ceramic-coated headers **WILL result in damage to the coating and will VOID all warranties.** Ceramic-coated headers require several heat cycles to fully cure before they will withstand extreme heat. Hooker® recommends using a cast iron exhaust manifold or old headers to break in new engines to avoid coating damage. Please call tech service at 1-270-781-9741 or 1-866-464-6553 for additional information regarding ceramic-coated exhaust products.

**BEFORE STARTING**

Your vehicle must be raised a minimum of 36 inches. A floor hoist is ideal. If no hoist is available we strongly urge the use of axle stands as a safety measure. **CAUTION!** Your car should not be supported on a bumper jack prior to installing headers, take the time to make a careful and complete inspection of both engine and transmission mounts. Replace them if they look worn or damaged, otherwise this may affect the header fitting into your vehicle properly.

**INSTALLATION PROCEDURE – PLEASE READ CAREFULLY!**

**LEFT SIDE:**

1. Disconnect the battery cable to prevent damage to the electrical system.
2. Unbolt the headpipes from the stock exhaust manifold and push aside.
3. Remove air conditioner compressor (if equipped), spark plugs, exhaust manifold, clutch linkage, cross shaft, oil filter, and transmission locking device (if equipped).
4. Remove center bolt from motor mount and raise the motor about 1 inch. Be sure to place a board between pan and jack.
5. Starting from below, work the header up through the chassis into position. Lower engine and replace mount bolt.
6. Place the gasket into position and start all bolts (most restricted first).

**NOTE:** If equipped with a smog pump, remove injection tubes from stock exhaust manifolds and install in headers (**Figure E**).

7. Work clutch linkage cross shaft through header into position.
8. Tighten all bolts evenly (most restricted first). Replace spark plugs.
9. This header requires the small throw away type oil filter (if not equipped).
10. Air condition equipped cars with compressor mounted on the left side, see **Figures B & C** for modification to bracket.

**RIGHT SIDE:**

1. Remove air condition compressor (if equipped), spark plugs, exhaust manifold, dipstick tube, and starter.
2. Starting from below, work the header and the starter up through the chassis into position. Place gasket into position and start all bolts.

**NOTE:** If equipped with a smog pump, remove injection tubes from stock exhaust manifolds and install in headers (**Figure E**).

3. Tighten all the bolts evenly (most restricted first).
4. Replace starter, dipstick tube, and spark plugs.

**NOTE:** Air condition equipped cars, use one bolt from stock exhaust and fabricate spacer for rear of compressor bracket (**Figure D**).

5. To connect the collectors to the headpipes, purchase Hooker reducer kit, P/N 11030HKR.

**NOTE:** A dual exhaust system can be fabricated using the HOOKER comp turbo mufflers (21005HKR or 21006HKR).

6. Connect the battery, start the engine, and check for leaks. Make sure all brake lines, fuel lines, transmission cooler lines, and electrical wires have sufficient clearance. Reroute, as necessary.
7. When finished, give your car a test drive, checking carefully for any new noises. After several days of driving, retighten all bolts.

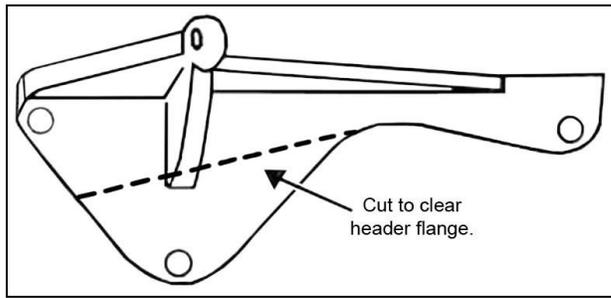


Figure B

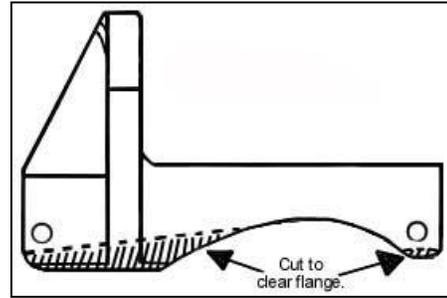


Figure C

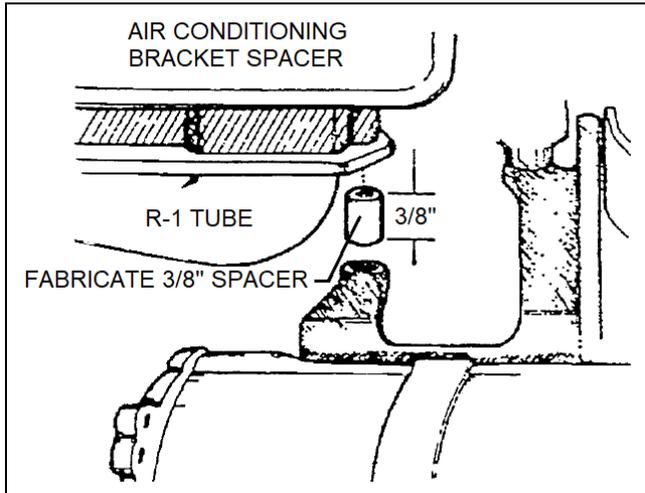


Figure D

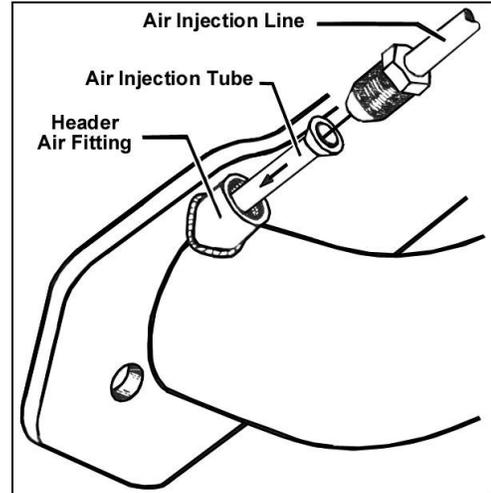


Figure E

**LIMITATION OF LIABILITY – DISCLAIMER**

The regulation of emissions production, noise levels, and safety standards is undertaken by the federal government, each of the fifty state legislatures, and by many local municipalities, towns, and counties.

HOKKER Industries makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the states where they may be sold to the ultimate purchaser, the consumer.

Unless expressly stated to the contrary in the catalog, instruction sheet, or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or nonconforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer.

In this connection, the retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.

**The foregoing statement limits the liability of the manufacturer.**

California vehicle code, sections 27156 and 38391, prohibits the advertising, offering for sale, or installation of any device, which modifies a vehicle's emission control system, unless exempted, unless otherwise noted. HOKKER™ Headers that have not received an Executive Order (E.O.) exemption from these code sections are not legal for sale or use in California on vehicles originally equipped with catalytic converters, except for racing vehicles, which may never be driven upon a highway. Check with your local authorities to determine if these headers are legal for use in your particular area.

**Toll-Free Phone: 1-866-464-6553 or [www.holley.com](http://www.holley.com)**

© 2006 Holley Performance Products, Inc. All rights reserved. Tous Droits Réservés.

199R11859

Date: 5-8-19