



64000FLT HEADER DUAL KIT 64002FLT MANIFOLD DUAL KIT

1975-87 PU ½, ¾, 1 TON, & SUBURBAN (305-400)

NOTE: Will not fit vehicles with wheelbases longer than 131.5".

NOTE: 51525FLT header duals: This system was designed to fit with 11500FLT and 31500FLT. If this is to be installed with headers other than these, some modification may be necessary. FLOWTECH™ does not assume responsibility for fit or performance.

NOTE: This performance exhaust system is not supplied with mufflers or muffler U-clamps. For maximum performance, we recommend FLOWTECH™ Raptor turbo mufflers (P/N 50051FLT) or an equivalent 2 ¼" inlet and outlet single offset turbo muffler.

WARNING! This device is not legal for use on pollution-controlled motor vehicles. It is intended for use on vehicles that will never be driven upon a highway.

WARNING! Breaking in an engine with ceramic-coated headers WILL result in damage to the coating and will VOID all warranties. Ceramic-coated headers require several heat cycles to fully cure before they will withstand extreme heat. FLOWTECH™ recommends using cast iron exhaust manifolds or old headers to break in new engines to avoid coating damage. Please call tech service at 270-781-9741 for additional information regarding ceramic-coated exhaust products.

We realize that you had many choices when you chose your headers, and we thank you for choosing ours. At FLOWTECH™ we put many years of performance exhaust experience into every product we build. We feel and know you will agree that FLOWTECH™ Headers are the best you can buy at any price.

As a result of the restricted room available in some engine compartments, you may experience a close fit to some body and chassis components. This is a normal condition. If this is your first time installing a set of headers, it may be time consuming. While not complex, stick with it. As soon as you start your engine, the reward of additional horsepower and performance will be well worth your efforts. Proper installation and periodic maintenance will result in maximum performance and life from your FLOWTECH™ Headers.


READ THESE INSTRUCTIONS CAREFULLY BEFORE STARTING:

For ease of installation, your vehicle must be raised a minimum of 24". **Warning:** should you decide to install any exhaust product yourself, be warned that the original equipment jack that came with the vehicle is intended for emergency use only. The use of a frame jack in conjunction with a floor jack as the main support is highly recommended to minimize the accidental dropping of a vehicle while the installation proceeds. Never go under any vehicle that is supported by a bumper jack!

INSTALLATION INSTRUCTIONS:

1. Remove the existing header crossover and exhaust system. Save the gaskets and sleeves from the headpipes. Remove the old pipe hangers.
2. Install the new headpipes reusing the gaskets and sleeves mentioned above. Hand tighten only, as to hold pipe in place. Install the front and rear section headpipe (on header duals #51525FLT, install header extensions using 2 ½" U-clamps). Do not tighten.
3. Install the mufflers on the headpipes (or header extensions) per Figure 1. Put U-clamps in place, but do not tighten. Rotate the headpipes and mufflers to clear the transfer case, driveshaft, and frame. Over the front or rear of the muffler, you will find a crossmember or body mount that can be drilled to accept a 5/16" bolt and rubber hanger.
4. Models with 117.5" and 131.5" wheel bases, it will be necessary to install the front tailpipe extensions. On the 117.5" wheelbase, cut approximately 14" off the front of pipe (see Figure 1).
5. Install the tailpipe sections with the hump in the pipe up over the rear axle housing to allow for maximum suspension clearance.
6. As the tailpipe exit under the frame to the rear of the vehicle, locate a hole in this area to mount the 90° metal bracket and hanger to. It may be necessary to drill a new hole as mentioned in #3 above. See Figure 1 for desired pipe location. Cut the end of the tailpipes for desired length.
7. Make sure all components of the exhaust system clear all frame members, hoses, suspension, and brake lines.
8. Starting from the front of the vehicle, tighten all U-clamps and hangers, making sure that all parts are clear and will not leak or rattle.

When you have finished installing your headers, take the vehicle for a road test. Listen carefully for any exhaust leaks or other strange noises and make corrections. When the vehicle has been driven for a few days, retighten the header bolts. We find that periodically checking the bolts will prevent the flange from warping and the header gasket from burning out.

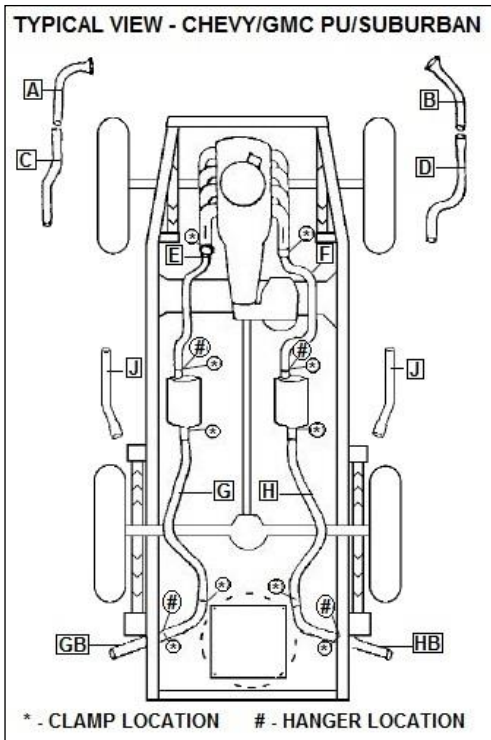

| 64000FLT | | HEADER DUAL KIT | | Qty | Ref |
|---------------|-------------------------|-----------------|----|-----|-----|
| Part Number | Description | | | | |
| 51525LHEFLT | LEFT HEADER EXTENSION | 1 | E | | |
| 51525RHEFLT | RIGHT HEADER EXTENSION | 1 | F | | |
| 51525LTP-AFLT | LEFT TAILPIPE A | 1 | G | | |
| 51525LTP-BFLT | LEFT TAILPIPE B | 1 | GB | | |
| 51525RTP-AFLT | RIGHT TAILPIPE A | 1 | H | | |
| 51525RTP-BFLT | RIGHT TAILPIPE B | 1 | HB | | |
| 51525FTEFLT | EXTENSIONS | 2 | J | | |
| CL10004TNN | 2 1/4" U-CLAMPS | 6 | | | |
| CL10008TNN | 2 1/2" U-CLAMPS | 4 | | | |
| H16-5101FLT | TAILPIPE HANGERS | 4 | | | |
| UN3-5101FLT | HANGER BRACKETS | 2 | | | |
| 56112-5804FLT | 5/16-18X1 1/2 BOLTS | 2 | | | |
| 56114-5804FLT | 5/16-18X1 1/4 BOLTS | 6 | | | |
| 56000-5805FLT | 5/16-18 HEX NUTS | 8 | | | |
| 56000-5803FLT | 5/16 SPLIT LOCK WASHERS | 8 | | | |
| FW10-5807FLT | 5/16 FENDER WASHERS | 10 | | | |
| BRL4-5101FLT | BRACKETS | 2 | | | |
| FML-6201FLT | FEMALE GROMMETS | 2 | | | |
| ML-6201FLT | MALE GROMMETS | 2 | | | |

| 64002FLT | | MANIFOLD DUAL KIT | | Qty | Ref |
|---------------|---------------------------|-------------------|----|-----|-----|
| Part Number | Description | | | | |
| 52525LMHFLT | LEFT MANIFOLD HEADPIPE | 1 | A | | |
| 52525RMHFLT | RIGHT MANIFOLD HEADPIPE | 1 | B | | |
| 52525LRHFLT | HEADPIPE | 1 | C | | |
| 52525RRHFLT | HEADPIPE | 1 | D | | |
| 51525LTP-AFLT | LEFT TAILPIPE A | 1 | G | | |
| 51525LTP-BFLT | LEFT TAILPIPE B | 1 | GB | | |
| 51525RTP-AFLT | RIGHT TAILPIPE A | 1 | H | | |
| 51525RTP-BFLT | RIGHT TAILPIPE B | 1 | HB | | |
| 51525FTEFLT | FRONT TAILPIPE EXTENSIONS | 2 | J | | |
| CL10004TNN | 2 1/4" U-CLAMPS | 6 | | | |
| CL10008TNN | 2 1/2" U-CLAMPS | 4 | | | |
| H16-5101FLT | TAILPIPE HANGERS | 4 | | | |
| UN3-5101FLT | HANGER BRACKETS | 2 | | | |
| 56112-5804FLT | 5/16-18X1 1/2 BOLTS | 2 | | | |
| 56114-5804FLT | 5/16-18X1 1/4 BOLTS | 6 | | | |
| 56000-5805FLT | 5/16-18 HEX NUTS | 8 | | | |
| 56000-5803FLT | 5/16 SPLIT LOCK WASHERS | 8 | | | |
| FW10-5807FLT | 5/16 FENDER WASHERS | 10 | | | |
| BRL4-5101FLT | BRACKETS | 2 | | | |
| FML-6201FLT | FEMALE GROMMETS | 2 | | | |
| ML-6201FLT | MALE GROMMETS | 2 | | | |
| 56368HKR | FLG.2-1/4" RINGS | 2 | | | |

How did we do? Your questions and comments are always welcome at FLOWTECH™. Our technical service department is open Monday through Friday, during the hours of 7:00 a.m. until 5:00 p.m. Central Time. We can be reached at:

**TECHNICAL SUPPORT
PHONE: 270-781-9741**

For online help, please check the Tech Service section of our website: www.holley.com

LIMITATION OF LIABILITY - DISCLAIMER: The regulation of emissions production, noise levels, and safety standards is undertaken by the federal government, each of the fifty state legislatures and by many local municipalities, towns, and counties.

FLOWTECH™ makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the states where they may be sold to the ultimate purchaser, the consumer.

Unless expressly stated to the contrary in the accompanying catalog, instruction sheet, or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or nonconforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer.

In the connection, retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.

THE FOREGOING STATEMENT LIMITS THE LIABILITY OF THE MANUFACTURER.

California vehicle code, sections 27156 and 38391, prohibits the advertising, offering for sale, or installation of any device, which modifies a vehicle's emission control system, unless exempted, unless otherwise noted. FLOWTECH™ Headers that have not received an Executive Order (E.O.) exemption from these code sections are not legal for sale or use in California on vehicles originally equipped with catalytic converters, except for racing vehicles, which may never be driven upon a highway. Check with your local authorities to determine if these headers are legal for use in your particular area.

**199R11909
Date: 5-14-19**