



64001FLT HEADER DUAL KIT

1975-81 Camaro & Z/28 (283-400)

NOTE: Will work with factory exhaust systems.

NOTE: 51555FLT header duals: This system was designed to fit with 11100FLT and 31100FLT. If this is to be installed with headers other than these, some modification may be necessary. FLOWTECH™ does not assume responsibility for fit or performance.

NOTE: This performance exhaust system is not supplied with mufflers or muffler U-clamps. For maximum performance, we recommend a 2 ¼" inlet and outlet single offset turbo muffler.

WARNING! This device is not legal for use on pollution-controlled motor vehicles. It is intended for use on vehicles that will never be driven upon a highway.

WARNING! Breaking in an engine with ceramic-coated headers WILL result in damage to the coating and will VOID all warranties. Ceramic-coated headers require several heat cycles to fully cure before they will withstand extreme heat. FLOWTECH™ recommends using cast iron exhaust manifolds or old headers to break in new engines to avoid coating damage. Please call tech service at 270-781-9741 for additional information regarding ceramic-coated exhaust products.

We realize that you had many choices when you chose your headers, and we thank you for choosing ours. At FLOWTECH™ we put many years of performance exhaust experience into every product we build. We feel and know you will agree that FLOWTECH™ Headers are the best you can buy at any price.

As a result of the restricted room available in some engine compartments, you may experience a close fit to some body and chassis components. This is a normal condition. If this is your first time installing a set of headers, it may be time consuming. While not complex, stick with it. As soon as you start your engine, the reward of additional horsepower and performance will be well worth your efforts. Proper installation and periodic maintenance will result in maximum performance and life from your FLOWTECH™ Headers.


READ THESE INSTRUCTIONS CAREFULLY BEFORE STARTING:

For ease of installation, your vehicle must be raised a minimum of 24". **Warning:** should you decide to install any exhaust product yourself, be warned that the original equipment jack that came with the vehicle is intended for emergency use only. The use of a frame jack in conjunction with a floor jack as the main support is highly recommended to minimize the accidental dropping of a vehicle while the installation proceeds. Never go under any vehicle that is supported by a bumper jack!

INSTALLATION INSTRUCTIONS:

1. Remove the existing headpipes, mufflers, tailpipes, and all brackets.
2. Install the new headpipes reusing the gaskets and sleeves mentioned above. Hand-tighten only, as to hold pipe in place.
3. Install the mufflers on the header extensions per Figure 1. Put U-clamps in place, but do not tighten. Rotate the headpipes and mufflers to clear the transmission, driveshaft, and frame.
4. Install the tailpipe sections with the hump in the pipe up over the rear axle housing to allow for maximum suspension clearance.
5. Hangers are to be installed as follows: The first is to be installed in the first inside bolt hole of the OEM muffler bracket (both sides). The next is to be installed in the front bolt of the OEM tailpipe hanger on the outside of the frame behind the rear wheel (both sides).
6. Cut the end of the tailpipes for desired length.
7. Make sure all components of the exhaust system clear all frame members, hoses, suspension, and brake lines.
8. Starting from the front of the vehicle, tighten all U-clamps and hangers, making sure that all parts are clear and will not leak or rattle.

When you have finished installing your headers, take the vehicle for a road test. Listen carefully for any exhaust leaks or other strange noises and make corrections. When the vehicle has been driven for a few days, retighten the header bolts. We find that periodically checking the bolts will prevent the flange from warping and the header gasket from burning out.

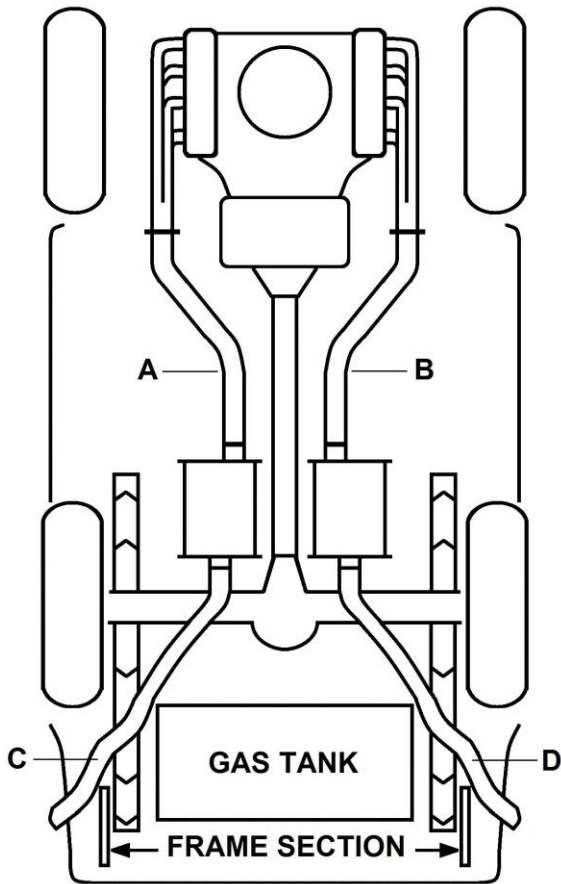

VIEW FROM TOP

64001FLT HEADER DUAL KIT

Part Number	Description	Qty	Ref
51555LHEFLT	LT. HEADER EXTENSION	1	A
51555RHEFLT	RT. HEADER EXTENSION	1	B
51555LTFEFLT	LEFT TAILPIPE	1	C
51555RFEFLT	RIGHT TAILPIPE	1	D
BRL4-5101FLT	BRACKET	2	
160401TNN	GASKET	2	
160771TNN	FLANGE, METAL	2	
38100-5802FLT	3/8-16x1 BOLT	6	
38000-5805FLT	3/8-16 HEX NUT	6	
38000-5803FLT	3/8 SPLIT LOCK WASHER	6	
CL10007TNN	HEAVY MUFFLER CLAMP W/SADDLE	4	
H16-5101FLT	HANGER	4	
ML-6201FLT	MALE GROMMET	6	
FML-6201FLT	FEMALE GROMMET	6	
FW10-5807FLT	5/16 FENDER WASHER	12	
ST3-5101FLT	BRACKET	4	
56000-5803FLT	5/16 SPLIT LOCK WASHER	6	
56000-5805FLT	5/16-18 HEX NUT	12	
56112-5802FLT	5/16X1 1/2 SHT. MTL. SCREW	4	
56112-5804FLT	5/16-18X1 1/2 HHCS	6	

How did we do? Your questions and comments are always welcome at FLOWTECH™. Our technical service department is open Monday through Friday, during the hours of 7:00 a.m. until 5:00 p.m. Central Time. We can be reached at:

**TECHNICAL SUPPORT
PHONE: 270-781-9741**

For online help, please check the Tech Service section of our website: www.holley.com

LIMITATION OF LIABILITY - DISCLAIMER: The regulation of emissions production, noise levels, and safety standards is undertaken by the federal government, each of the fifty state legislatures and by many local municipalities, towns, and counties.

FLOWTECH™ makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the states where they may be sold to the ultimate purchaser, the consumer.

Unless expressly stated to the contrary in the accompanying catalog, instruction sheet, or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or nonconforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer.

In the connection, retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.

THE FOREGOING STATEMENT LIMITS THE LIABILITY OF THE MANUFACTURER.

California vehicle code, sections 27156 and 38391, prohibits the advertising, offering for sale, or installation of any device, which modifies a vehicle's emission control system, unless exempted, unless otherwise noted. FLOWTECH™ Headers that have not received an Executive Order (E.O.) exemption from these code sections are not legal for sale or use in California on vehicles originally equipped with catalytic converters, except for racing vehicles, which may never be driven upon a highway. Check with your local authorities to determine if these headers are legal for use in your particular area.

**199R11910
Date: 5-14-19**