



2014-2015 C7 Corvette
Blackheart 3" 304SS Exhaust System w/ AFM Valves
70501343-RHKR w/ Mufflers – Race Only
70501344-RHKR w/o Mufflers – Race Only



Installation Instructions

Thank you for making HOOKER HEADERS your choice in a high-performance exhaust system. Extensive dyno/track testing has enabled HOOKER to offer the most advanced design in exhaust systems. The installation, while not complex, will take a certain amount of time. However, the additional horsepower and improved performance will more than justify your efforts. Proper installation and maintenance will ensure long life and maximum performance from your HOOKER BLACKHEART exhaust system.

BEFORE STARTING:

Your vehicle must be raised a minimum of 18 inches. A floor hoist is ideal. If no hoist is available, we strongly urge the use of axle stands as a safety measure. **Please read and understand these instructions and disclaimer in their entirety before attempting installation.**

IMPORTANT! Cutting the factory X-pipe is required to install this exhaust system.

CAUTION! WORK ONLY ON A LEVEL SURFACE. USE JACKS /JACK STANDS OF SUFFICIENT CAPACITY TO LIFT AND SUPPORT YOUR VEHICLE. NEVER WORK UNDER A VEHICLE SUPPORTED BY A FLOOR OR BUMPER JACK.

INCLUDED HARDWARE:

Accessory Pack Contents:		
P/N	Qty.	Description
556R23	4	76mm Band Clamps
199R10928	1	Instruction Sheet
505R57	4	5mm x 14mm Bolts
546R12	4	5mm Lock Washers
539R23	4	5mm Nuts
599R94	2	Blackheart Decals
517R63	1	Hooker Logo Plate
556R27	2	3" Torca Couplers
539R25	4	10mm Flange Nuts
505R69	4	10mm x 60mm Bolts

Parts List:	
Qty.	Description
1	Left Over-Axle Pipe
1	Right Over-Axle Pipe
1	Left Muffler or Muffler Delete
1	Right Muffler or Muffler Delete
1	X-Pipe
1	Left Link Pipe
1	Right Link Pipe

Tools Needed:
Spray Lube (WD 40®)
3/8" Drive Metric Socket Set
12" 3/8 Drive Extension
3/8 Universal
15mm - 18mm Deep Sockets
1/4" Socket Set w/ 7mm Socket
Small Flat Blade Screwdriver
8mm Wrench

INSTALLATION:

IMPORTANT: Inspect your accessory pack: BEFORE YOU START!

1. Place the vehicle on flat a surface, set the parking brake, and block the front wheels.

2. Disconnect the battery.
3. Lift the vehicle and support with jack stands.

WARNING! Never support a vehicle with a floor or bumper jack.

REMOVING THE OEM EXHAUST:

NOTE: Removal of the rear bumper fascia is necessary and will require a second person to help with the removal and re-installation.

1. Remove the side vents. Remove the reflectors and license plate to access the mounting bolts behind them. Be very careful not to break the tabs. See **Figures 1, 2, & 3**.
2. Remove the screws behind the reflectors (x2 each), license plate (x2), above the tips (x2) and bottom of the bumper cover (x5 each side – 10 total).
3. Release the clips on the fascia from the inside and pull outward and up while holding the tabs on the clips. Be careful not to break the tabs on the clips. Take your time and do one at a time. **Note:** Place a small piece of tape on the fascia at the back up camera to prevent the camera from scratching the paint on the fascia as it pulls out.
4. Remove the fascia and place out of the way.



Figure 1

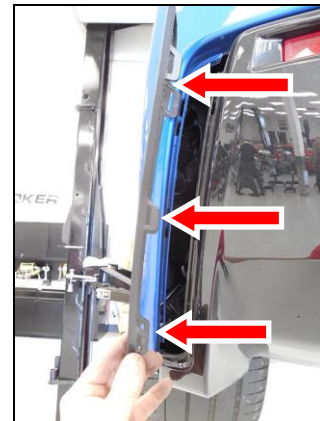


Figure 2

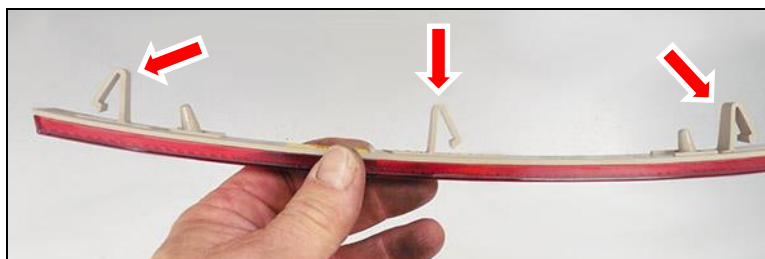


Figure 3

5. Remove the bolts on the lower skid plate and remove.
6. Support the X-pipe and remove the (x4) 15mm nuts at the flanges on the down pipes (**Figure 4**). Loosen the 15mm clamp bolts at the slip joint connecting the X-pipe to the over-axle pipes (**Figure 5**). Remove the (x2) 13mm bolts at the center support hanger on the X-pipe (**Figure 5**). Remove the X-pipe from the over-axle pipes.

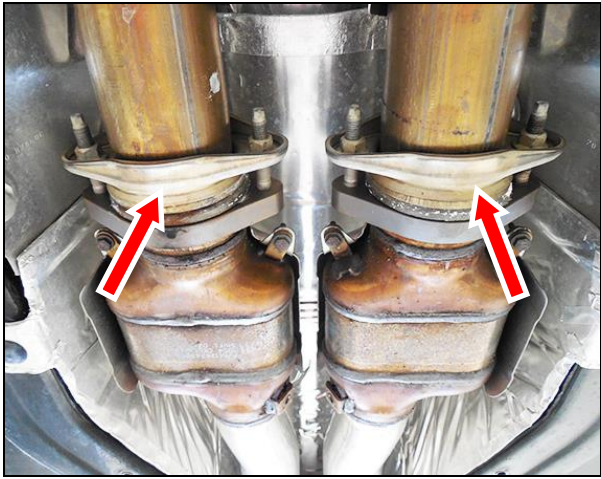


Figure 4

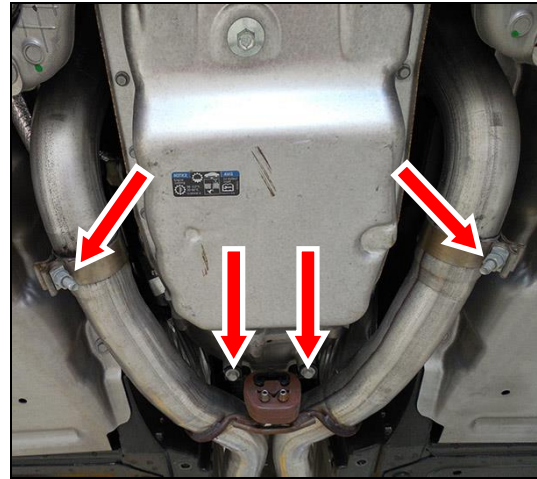


Figure 5

7. Remove the 13mm bolts at each muffler hanger (x2 each). Remove the (x2) 13mm bolts between the mufflers.
8. Unplug the electrical connector on each AFM valve on each muffler assembly and at the tips for the NPP valve (if applicable).

NOTE: To unlock the connectors, push down on the GREY lock tab and slide the lock backwards away from the valve. Unplug the connector.

NOTE: Automatic transmissions must be placed in neutral for the driver's side over-axle pipe to clear the linkage. Following the procedure to place the vehicle in "service mode" will allow the shifter to be moved from PARK with the engine off. Be sure to shut the ignition off after the shifter is moved from park to prevent the battery from being drained.

9. Remove the left and right muffler assemblies from the vehicle.
10. Remove the AFM actuator from the OEM muffler assemblies by removing the (3) 8mm screws on each valve.

INSTALLATION OF THE BLACKHEART CAT-BACK EXHAUST:

1. Install the AFM valve actuator onto the new Blackheart over-axle pipes. Line up the actuator mounting holes and install the (x3) 8mm screws. Be sure the drive on the actuator is correctly seated into the valve coupler.
2. Install the 76mm band clamps onto each inlet pipe of the Blackheart X-pipe (expanded end with notches). The clamps need to be configured so the threaded stud of the clamp is positioned to align with the cut out in the lower skid plate (**Figure 6**).
3. Install the RIGHT link pipe (long link pipe) into the X-pipe's short expanded end (**Figure 6**). Tighten the clamp to allow for adjustment.
4. Install the LEFT link pipe (short link pipe) into the X-pipe's long expanded end (**Figure 6**). Tighten the clamp to allow for adjustment.

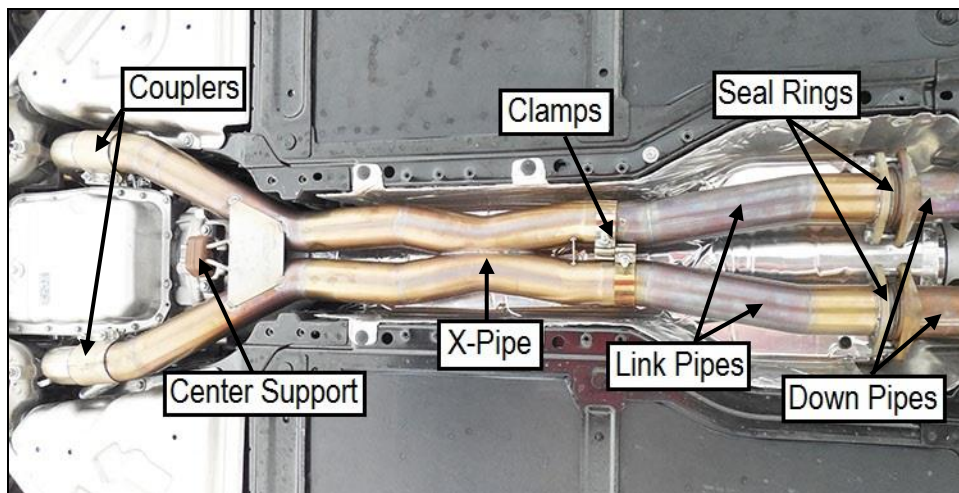


Figure 6

5. Remove the seal ring on the catalytic converter flange. Tap a thin screwdriver between the flange and the seal ring and carefully work the gasket off the pipe. Install the seal ring on the inlet of the link pipe. **NOTE:** If the seal rings are damaged, replace them with GM P/N 10354707.
6. Install the X-pipe with link pipes onto the down pipes. Install the 10mm x 60mm bolts and flange nuts. Tighten the nuts to allow for adjustment. Support the X-pipe assembly. Install the center support hanger assembly and tighten the (x2) 13mm bolts (**Figure 6**). Adjust the position of the link pipes if necessary and tighten the (x4) nuts.
7. Install the 3" Torca couplers onto the outlet of the X-pipe with the bolts towards the transmission and the nuts facing down (**Figure 6**).
8. Install the left and right over-axle pipes with the valve assembly facing in towards the transaxle. Install the pipe over the axle and align with the X-pipe. Slide the coupler from the X-pipe onto the link pipe with a 50/50 split on each pipe. Plug in the valve and tighten the coupler to allow for adjustment.
9. Install the 76mm band clamps onto the inlet pipes of the mufflers or muffler delete pipes. Position the clamp with the bolt at the top of the pipe and the nut facing outwards towards the tire (**Figure 7**).



Figure 7

10. Remove the muffler hanger isolators from the OEM mufflers and install on to the Blackheart mufflers or muffler delete pipes.
 11. Install the left and right mufflers or muffler delete pipes onto the over-axle pipes. Locate the muffler hangers at the bolt holes and install the (x2) 13mm bolts on each muffler assembly. Tighten the 76mm band clamp on the muffler to allow for adjustment.
 12. Install the Hooker Logo plate between the mufflers with the supplied 5mm hardware and tighten to allow for adjustment.
 13. Adjust the pipes for best clearance and tip alignment with the rear fascia removed. Use a straight edge to align the tips and tighten all hardware starting at the front and working towards the rear. Final tip alignment will be done after the rear fascia is installed.
 14. Install the rear fascia in reverse order it was removed.
- NOTE:** Be sure the two locator tabs on either side of the backup camera go into the slots in the bumper cover and not under them. It will be helpful to lift up on the center of the fascia through the opening in the center of the fascia pushing the tabs up into the slots and under the backup camera. Keep pressure inward as the remainder of the locking tabs are aligned and pressed into place.
15. Install the hardware, reflectors, side vent grates, and license plate.
 16. If additional alignment is necessary, loosen the clamps at the X-pipe and the mufflers. Adjust the depth and alignment of the tips by rotating the pipes and moving the mufflers in or out on the tubes as necessary. After the desired alignment is achieved, tighten the logo plate hardware. Tighten the clamps on the X-pipe and muffler.
 17. Re-check all hardware, clearances and electrical connections.
 18. Install the skid plate. Do not over tighten the bolts. It is easy to damage the threads.

NOTE: Muffler separator plate with no HOOKER logo is available as P/N 10914HKR. Visit the Holley website @ www.holley.com to order online. See **Figure 8**.

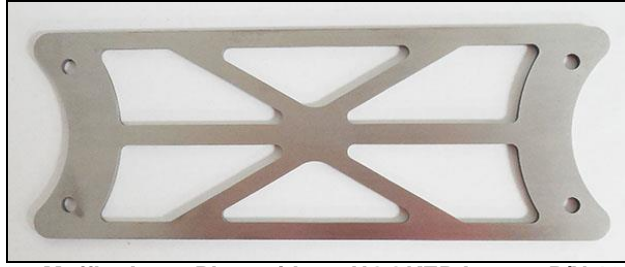


Figure 8 – Muffler Logo Plate without HOOKER Logo – P/N 10914HKR

19. Remove the jack stands and lower the car. Connect the battery and remove the wheel blocks.
20. Start the vehicle and check for leaks and loose hardware. Check all hardware again after the first 150 miles of driving.

Enjoy your Blackheart Exhaust!

LIMITATION OF LIABILITY – DISCLAIMER:

The regulation of emissions production, noise levels, and safety standards is undertaken by the federal government, each of the fifty state legislatures, and by many local municipalities, towns, and counties.

HOOKER™ makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the state where they may be sold to the ultimate purchaser, the consumer.

Unless expressly stated to the contrary in the catalog, instruction sheet; or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or non-conforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer.

In this connection, the retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.

THE FOREGOING STATEMENT LIMITS THE LIABILITY OF THE MANUFACTURER.

California vehicle code, sections 27156 and 38391, prohibits the advertising, offering for sale, or installation of any device, which modifies a vehicle's emission control system, unless exempted, unless otherwise noted. HOOKER™ Headers that have not received an Executive Order (E.O.) exemption from these code sections are not legal for sale or use in California on vehicles originally equipped with catalytic converters, except for racing vehicles, which may never be driven upon a highway. Check with your local authorities to determine if these headers are legal for use in your particular area.

Technical Support: 1-866-464-6553

© 2015 Hooker Headers, Inc. All rights reserved.

199R10928

Revision Date: 12-9-15